

nVidia SRX™

AUDIO/VIDEO RECORDER FOR INTERVIEWS

Record

Record in up to 12 rooms with easy one-button on/off switch for each room



View from your PC, tablet or iPhone!

Playback

Embedded Watermark

August 01, 2014 13:26:43


Frame-by-frame advance

Play back two interviews at the same time!

Use software to pan, tilt or zoom

Create snapshot

Jump to exact point in video

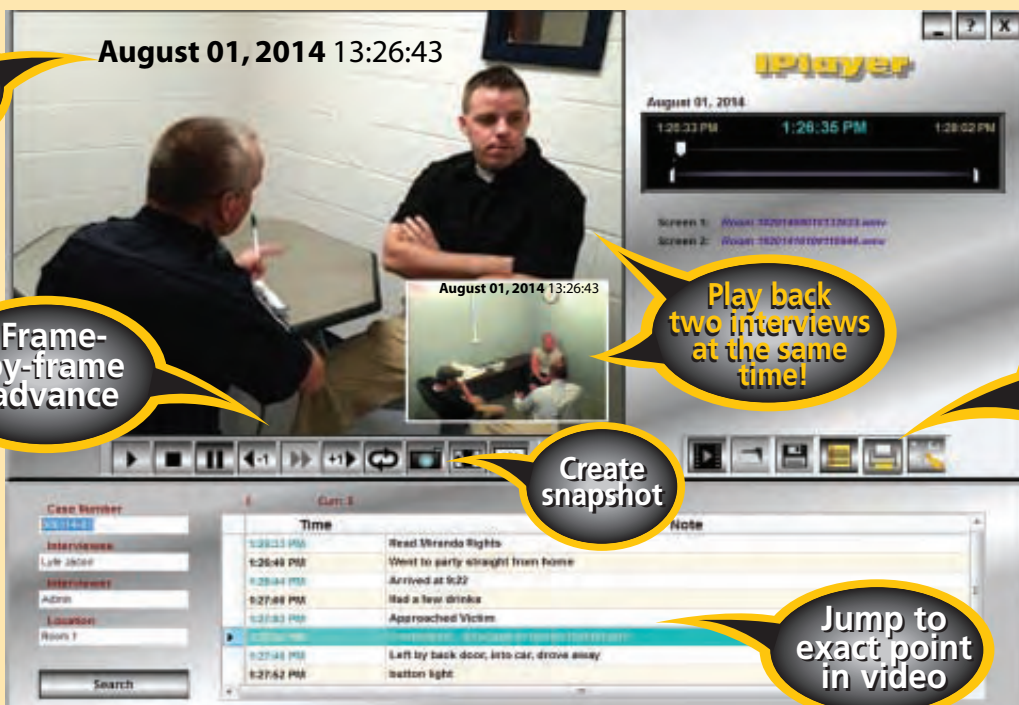

Features

- **Powerful Microphones**
- **High Definition Cameras**
- **Solid State Engineering**
- **Self or Professional Installation**



- Record up to 12 rooms
- Analog and IP Camera Compatible – provided with system or use existing
- Recordings started at Recording Computer or via Button with LED at Interview Room
- Remote Viewing of live interviews (iPad, smart phone or tablet)
- Summary Notes for easy categorization and searching
- Secure Recordings and access by Administrator, Group or User
- Easy duplication on a variety of media (CD, DVD, USB Flash Drive, etc.)
- Automatic and Manual Backup Capabilities
- Adjustable Video Display Area (regular or full screen)
- Multiple Recording Playback
- Add Detailed notes hot-linked directly to recordings, by time
- Take Snapshots of still images from recordings for easy distribution
- Picture-in-Picture Capable
- Install on your own PCs
- Fully Installed Turnkey Solution or Easy Self Installation Kit Available

InVidia SRx Recorder System Specifications

Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
Video	IP Video Input Supported: 4 Channels Standard. Upto 6 channels Analog Video Input Supported: 4 Channels Standard. Upto 6 channels. BNC Analog Video Standard..... NTSC(525Line, 60f/s), PAL(625Line, 50f/s)
Audio	Input 4 channels Standard. Upto 6 Channels. BNC Output 1 channel, BNC
Display	Interface..... 2 HDMI, 1 VGA, 1 TV, 1 Spot, BNC Resolution 1920x1080, 1280x1024, 1280x720, 1024x768 Privacy Masking 4 rectangular zones (each camera)
Recording	Video Encoding H.264 / MJPEG(IP) / AVI / MPEG4 Audio Encoding G.711 Image Resolution 1080P(1920x1080) / 720P(1280x720) / 960H(960x576/960x480) / D1/4CIF(704x576/704x480) CIF(352x288/352x240) / QCIF(176x144/176x120)
Playback & Backup	Search Mode Time/Date, Smart search via InVidia Iplayer Playback Functions Play, Pause, Stop, Rewind, Frame by Frame, Loop Play, Digital zoom, Picture in Picture Backup Mode USB Device / Network / CD / DVD
Network	Ethernet 2 RJ-45 ports (10/100M/1000M) Max. User Access 128 users Mobile Phone Access iPhone, iPad, Android, Windows Phone
Storage	Internal HDD 1 TB Standard. Supports upto 32TB External HDD 1 eSATA port
Auxiliary Interface	USB Interface 4 ports (2 Rear), USB2.0 RS232 1 port, For PC communication & Keyboard RS485 1 port, For PTZ control
General	Power Supply 100~240VAC, 50/60Hz Power Consumption 40W Working Environment 14 ~ 131° F (-10 ~ +55°C) / 10~90%RH / 86~106kpa Dimension(WxDxH) 2U, 17.32"x18.11"x3.50" (440mm×460mm×89mm) Weight 14.33lb without HDD (6.5KG)